



SF931



Main Features

- 6 lighting modes for various lighting scenarios
- 1000 lm super high brightness
- Super long operating time up to 20 h
- 3 lighting sources, super long lifespan
- Mobile power bank for emergencies
- Multiple fixing methods suitable for various purposes
 - 360° rotatable bracket
 - Strong magnet
 - Tripod standard holding-hole
 - Spring buckle
- Rechargeable with USB-C port
- Super compact & lightweight

Specifications

Power Source: 3.7V, 4000mAh 14.8Wh 21700 Li-ion battery
 Light Source: COB +2 × Filament LED +5 × Red SMD
 Lighting Mode:
 (Front) High / Low / Flashing ;
 (Back) White / Red / SOS
 Lumen Output:
 Front High: 1000 lm; Front Low: 300 lm; Back White: 50lm
 Correlated Color Temperature (CCT): COB: 3500K - 4500K
 Continuous Operating Time:
 Front High: 3.5 h / Front Low: 8 h; Back White: 20 h
 Charging Time: 6 h
 Input : 5V $\overline{=}$ 1A
 Output (USB-A): 5V $\overline{=}$ 1A
 Dimensions (L × W × H): 93 × 30 × 98 mm
 Net Weight: 175 g

SF575S



Main Features

- Rechargeable with a built-in 5000mAh Li-ion battery
- Powerful COB - up to 1500 lm
- Long-lasting COB
- Three lighting modes
- 180° rotatable bracket for convenient use and lighting angles
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V 5000mAh 18650 Li-ion battery
 Input: 5V $\overline{=}$ 2A Max
 Charging Time: 5 h (approx)
 Output: 5V $\overline{=}$ 1A Max
 Light Source: 15W COB
 Lighting Modes: High / Low / Flashing
 Lumen Output: High:1500 lm / Medium:700 lm / Low:300 lm
 Running Time: High:5 h / Medium:10 h / Low: 14 h
 Dimensions: 172×127×47 mm
 Ingress Protection: IPX4

SF254S



Main Features

- 4-IN-1 Multifunctional
Mini work light, keychain light, bottle opener and screwdriver in one
- 5 lighting modes for various lighting scenarios
- Ultra-high brightness up to 420 lm
- Powerful wide-angle illumination
- Rechargeable with USB-C port
- Super compact and lightweight
- Hands-free operation

Specifications

Power Source: 3.7V, 500mAh Rechargeable Li-Polymer
 Lighting Source: COB (White: 5W / Amber: 3W / Red: 0.5W)
 Light Mode: Red / Cool White / Neutral White /
 Cool White+ Neutral White / Red Flashing
 Beam Distance: 30 m
 Charging Time: 1.5 h (Appr.)
 Dimensions: 45x34x63 mm



SF225



Main Features

- 10W high power LED and dual color SMD
- Multifunctional as lighting and power supply
- 7 lighting modes
- Ultra-high illumination - up to 1000 lm & 480m beam distance
- Adjustable shoulder strap and ergonomic handle
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V, 4800mAh lithium battery pack (built-in)

Lighting Source: 10W LED + 104 x SMD

Input: 5V \square 1A

Output: 5V \square 1A

Lighting Modes:

Front LED: White High / White Low / White Flashing

Middle SMD: White High / White Low

Back SMD: Red / Red Flashing

Lumen Output: Front LED: White High 1000 lm / White Low 470 lm

Middle SMD: White High 420 lm / White Low 270 lm

Run Time:

Front LED: White High 3.5 h / White Low 9.5 h

Middle SMD: White High 10h / White Low 18 h

Charging Time: 8 h (Approx.)

Correlated Color Temperature (CCT): 5500K - 7000K

Dimensions: 200x107x146 mm

SF227



Main Features

- 10W high power LED and dual color SMD
- Multifunctional as lighting and power supply
- 7 lighting modes
- 1000 lm ultra-bright & 400m beam distance
- Adjustable handle with two positions
- Convenient hook and screw hole for ease of use
- Rechargeable with USB-C port

Specifications

Power Source: 3.7V, 3000mAh lithium battery pack (built-in)

Light Source: 10W LED + 35 x SMD

Input: 5V \square 1.5A Max

Output: 5V \square 1A

Lighting Modes:

Front LED: White High / White Low / White Flashing

Middle SMD: White High / White Low

Back SMD: Red / Red Flashing

Lumen Output:

Front LED: White High 1000 lm / White Low 340 lm

Middle SMD: White High 170 lm / White Low 50 lm

Run Time:

Front LED: White High 2 h / White Low 3.5 h

Middle SMD: White High 7.5 h / White Low 9 h

Charging Time: 5.5 h (Approx.)

Correlated Color Temperature (CCT): 6500-8500K

Dimensions: 175x105x121 mm



SF907S



Main Features

- 3-in-1 multifunctional: search light, work light and mobile power
- High brightness up to 1200 lm
- Super long beam distance up to 700 m
- 6 lighting modes for various lighting scenarios
- 0 ~ 90° adjustable light-head
- Rechargeable with USB-C port

Specifications

Light Source	Front: 10W LED		Middle: 40×SMD White		Back: 30×SMD Red	
	Front White High	Front White Low	Middle White High	Middle White Low	Back Red	Back Red Flashing
Lighting Modes	1200 lm	600 lm	300 lm	150 lm	/	/
Lumen Output	1200 lm	600 lm	300 lm	150 lm	/	/
Continuous Operating Time	4.5 h	10 h	9 h	12 h	/	/

Power Source: 3.7V 4800mAh Lithium Battery Pack
 Beam Distance: 700 m
 Correlated Color Temperature (CCT): 5500-7000K
 Charging Time: 3.5 h
 Input: 5V $\overline{\text{---}}$ 2.4A
 Output: 5V $\overline{\text{---}}$ 2A
 Dimensions [L×W×H]: 222×108×115 mm / 8.74×4.25×4.53 in
 Weight: 530 g / 1.17 lb (exclude cable)

SF308



Main Features

- 600-lumen super bright illumination
- 5 lighting modes with adjustable focus: 100%, 50%, 10%, Strobe and SOS
- Tactical construction, resistant to scratches, abrasions and corrosion
- Long operating time up to 8 h
- Digital display for power level
- Power bank for emergencies
- Rechargeable via an USB-C port

Specifications

Power Source: 3.7V, 2000mAh 7.4Wh 18650 Li-ion battery
 Light Source: 10W LED
 Lighting Mode: High / Medium / Low / Strobe / SOS
 Lumen Output: 600 lm / 300 lm / 60 lm
 Correlated Color Temperature (CCT): 7000K - 8000K
 Continuous Operating Time: 3 h / 6 h / 24 h
 Beam Distance: 120M
 Charging Time: 2.5 h
 Input: 5V $\overline{\text{---}}$ 1A
 Dimensions ($\Phi \times L$): 40 × 159 mm
 Net Weight: 145 g

SF87



Main Features

- High brightness up to 100 lm
- Easy to operate: button-switch ON / OFF
- Perfect size to fit in hand
- Small, lightweight & convenient

Specifications

Power Source: 3×AAA size batteries
 Lighting Source: 3W COB
 Lumen Output: 100 lm
 Continuous Operating Time: 5 h
 Correlated Color Temperature (CCT): 6000K-7000K



SF930



Main Features

- Wave sensor controllable within 10 cm
- 6 lighting modes for various lighting scenarios
- Long beam distance up to 35 m
- Dual lighting sources, super long lifespan
- Silicone headband, comfortable wearing

Specifications

Power Source: 3.7V, 800mAh 2.96Wh 14500 Li-ion battery
 Light Source: 1W White LED + 2 × 0.15W Red LED + 2 × 0.5W White COB
 Lighting Mode: LED High / LED Low / LED High + COB / COB / Red / SOS
 Lumen Output: LED High: 80 lm; LED Low: 30 lm; LED + COB: 130 lm; COB: 70lm
 Beam Distance: 35 m
 Correlated Color Temperature (CCT): LED: 7000K - 8000K / COB: 6000K - 7000K
 Continuous Operating Time:
 LED High: 3.5 h / LED Low: 8 h / LED + COB: 6 h / COB: 6.5 h
 Charging Time: 2.5 h
 Input: 5V = 0.5A
 Dimensions (L × H): 200 × 36 mm
 Net Weight: 60 g

WF256S



Main Features

- 2 Independent Lighting Systems (LED Spot light + COB Flood Light)
- Ultra-high brightness up to 280 lm
- Multifunction as head light / lantern / work light
- 7 basic lighting modes & LED+COB free-combined modes
- Long press either power button to turn off the light under any lighting mode
- Soft light with a frosted cap (removable)
- 60° adjustable light angle
- Integrated hook & clip & magnetic base

Specifications

Power Source: 3.7V, 800mAh Rechargeable Li-Polymer Battery
 Lighting Sources: 5W LED + 3W COB
 Lighting Modes:
 LED Switch: LED White High / LED White Low / LED White Flashing
 COB Switch: COB Red / COB White High / COB White Low / COB Red Flashing
 Luminous Flux:
 LED White High + COB White High: 280 lm / LED White High: 220 lm /
 LED White Low: 120 lm / COB White High: 90 lm / COB White Low: 45 lm
 Run Time:
 LED White High + COB White High: 1.5 h / LED White High: 2 h /
 LED White Low: 5 h / COB White High: 3 h / COB White Low: 5 h
 Charging Time: 1 h (Approx.)
 Beam Distance: 60 m
 Correlated Color Temperature (CCT): 6000-7000K
 Dimensions: 45×41×54 mm

SF905



Main Features

- Super-high brightness up to 470 lm
- Wave sensor controllable within 10 cm
- Long beam distance reaching 120 m
- 60° adjustable light angle
- 5 lighting modes for various lighting scenarios
- 2 lighting switches - manual button + wave sensor
- Integrated hook & clip & magnetic base
- Rechargeable via USB-C port
- LED power indicator

Specifications

Power Source: 3.7V, 1200mAh Li-polymer Battery
 Lighting Source: 5W LED+ 3W COB
 Lighting Mode: LED White / COB White / LED White + COB White /
 COB Red / COB Red Flashing
 Luminous Flux: LED White: 330lm / COB White: 250lm /
 LED White + COB White: 470 lm
 Beam Distance: 120 m
 Run Time: LED White: 3.5 h / COB White: 6 h / LED White + COB White: 2.5 h
 Correlated Color Temperature (CCT): 5500K-6500K
 Sensor Distance: 10 cm
 Charging Time: 3 h (Approx.)
 Dimensions: 73 × 41 × 42 mm
 Net Weight: 75 g (exclude cable)



SF241



Main Features

- High illumination of 400 lm
- Effective 360° lighting
- Stepless dimmer meets different lighting needs
- Convenient handle for easy carrying or hanging
- Mobile power for emergencies
- Rechargeable via a USB-C port



Specifications

Power Source: 3.7V 4000mAh 18650 Lithium Battery Pack
 Light Source: 15×2835 White SMD+3×0.5W LED Filament
 Lighting Modes: LED filament lighting, LED filament+SMD lighting
 Lumen Output: 15-400 lm
 Continuous Operating Time: 5-40 h (Approx.)
 Correlated Color Temperature (CCT): 3000K-4500K
 Input: 5V --- 2A
 Charging Time: 3.5 h (Approx.)
 Output: 5V --- 1A
 Dimensions(Φ×H): 138×194 mm / 5.43×7.64 in
 Net Weight: 510 g / 1.12 lb (exclude cable)

SF242



Main Features

- High illumination of 350 lm
- Effective 360° lighting
- Stepless dimmer meets different lighting needs
- Convenient handle for easy carrying or hanging
- Mobile power for emergencies
- Rechargeable via a USB-C port



Specifications

Power Source: 3.7V 2000mAh 18650 Lithium Battery
 Light Source: 20×2835 White SMD+4×0.5W LED Filament
 Lighting Modes: LED filament lighting, LED filament+SMD lighting
 Lumen Output: 15-350 lm
 Continuous Operating Time: 4-25 h (Approx.)
 Correlated Color Temperature (CCT): 3000K-5500K
 Input: 5V --- 2A
 Charging Time: 2.5 h (Approx.)
 Output: 5V --- 1A
 Dimensions: 146×146×115 mm / 5.75×5.75×4.53 in
 Net Weight: 265 g / 0.58 lb (exclude cable)

SF229



Main Features

- 2 lighting modes: ON, AUTO (motion sensor)
- Motion sensor activates within 3 m & 120° in darkness
- High bright illumination up to 110 lm
- Great task lighting for large or small areas
- Magnetic mount (no wiring, no drilling)

Specifications

Power Source: 3.7V, 600mAh rechargeable Li-polymer battery
 Lighting Source: 28 x SMD 4014
 Input: 5V --- 0.5A
 Lumen Output: 110 lm
 Sensing Distance: 3 m
 Sensing Angle: 120°
 Continuous Operating Time: 3 h
 Charging Time: 2 h (Appr.)
 Correlated Color Temperature (CCT): 4000K - 4500K
 Dimensions: 206 x 40 x 13 mm / 8.11 x 1.57 x 0.51 in
 Net Weight: 80 g / 0.18 lb (exclude cable)



SF303



Main Features

- 2 lighting modes: ON, AUTO (motion sensor)
- Motion sensor activates within 3 m & 120° in darkness
- High bright illumination up to 150 lm
- Great task lighting for large or small areas
- Magnetic mount (no wiring, no drilling)

Specifications

Power Source: 3.7V, 800mAh rechargeable Li-polymer battery
 Lighting Source: 48 x SMD
 Input: 5V --- 0.5A
 Lumen Output: 150 lm
 Sensing Distance: 3 m
 Sensing Angle: 120°
 Continuous Operating Time: 2.5 h
 Charging Time: 2 h (Appr.)
 Correlated Color Temperature (CCT): 4000K - 4500K
 Dimensions: 326×40×13 mm / 12.83×1.57×0.51 in
 Net Weight: 130 g / 0.29 lb (exclude cable)





RT313



Main Features

- Long sensing distance up to 3 m
- 120° sensing angle
- Selectable color temperatures: Warm White / Neutral White / Cool White
- 3 lighting modes: Constant On / Night Sensing / All Day Sensing
- Easy magnetic mount; no wiring, no drilling
- Rechargeable via an USB-C port

Specifications

Power Source: 3.7V, 500mAh 1.85Wh Li-polymer battery
 Light Source: 18 × 0.2W Cool White LED + 18 × 0.2W Warm White LED
 Lighting Mode: Constant On / Night Sensing / All Day Sensing
 Lumen Output: 60 lm
 Correlated Color Temperature (CCT): 3000K / 4000K / 6500K
 Continuous Operating Time: 2 h
 Sensor Distance: 3 m
 Sensor Angle: 120°
 Charging Time: 1.5 h
 Input (USB-C): 5V $\overline{\text{DC}}$ 0.5A
 Dimensions (L × W × H): 200 × 30 × 25 mm
 Net Weight: 65 g

RT314




Main Features

- Long sensing distance up to 3 m
- 120° sensing angle
- Selectable color temperatures: Warm White / Neutral White / Cool White
- 3 lighting modes: Constant On / Night Sensing / All Day Sensing
- Easy magnetic mount; no wiring, no drilling
- Rechargeable via an USB-C port

Specifications

Power Source: 3.7V, 500mAh 1.85Wh Li-polymer battery
 Light Source: 24 × 0.2W Cool White LED + 24 × 0.2W Warm White LED
 Lighting Mode: Constant On / Night Sensing / All Day Sensing
 Lumen Output: 80 lm
 Correlated Color Temperature (CCT): 3000K / 4000K / 6500K
 Continuous Operating Time: 1.5 h
 Sensor Distance: 3 m
 Sensor Angle: 120°
 Charging Time: 1.5 h
 Input (USB-C): 5V $\overline{\text{DC}}$ 0.5A
 Dimensions (L × W × H): 250 × 30 × 25 mm
 Net Weight: 76 g

RT315

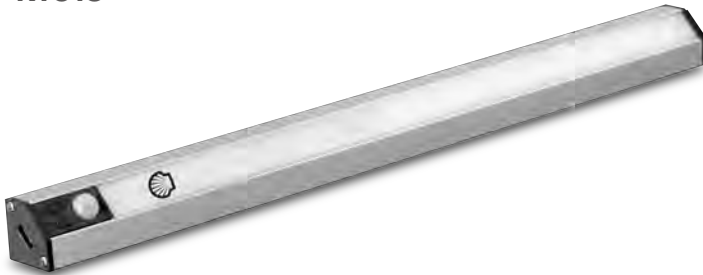

Main Features

- Long sensing distance up to 3 m
- 120° sensing angle
- Selectable color temperatures: Warm White / Neutral White / Cool White
- 3 lighting modes: Constant On / Night Sensing / All Day Sensing
- Easy magnetic mount; no wiring, no drilling
- Rechargeable via an USB-C port

Specifications

Power Source: 3.7V, 1000mAh 3.7Wh Li-polymer battery
 Light Source: 31 × 0.2W Cool White LED + 31 × 0.2W Warm White LED
 Lighting Mode: Constant On / Night Sensing / All Day Sensing
 Lumen Output: 100 lm
 Correlated Color Temperature (CCT): 3000K / 4000K / 6500K
 Continuous Operating Time: 2 h
 Sensor Distance: 3 m
 Sensor Angle: 120°
 Charging Time: 3 h
 Input (USB-C): 5V $\overline{\text{DC}}$ 0.5A
 Dimensions (L × W × H): 300 × 30 × 25 mm
 Net Weight: 93 g